

ILLUMINATION

Lasiris™ Mini Laser

FEATURES

- Compact and lightweight
- 635 to 830 nm
- Wide range of powers, patterns and fan angles
- Uniform intensity distribution with line generators
- Focusable
- ESD, over-temperature, and reverse-polarity protection
- Two year warranty
- Custom & OEM options available



COMPACT LASER LINE GENERATOR AND STRUCTURED LIGHT PATTERN PROJECTOR

Where size and weight are limited.

StockerYale's Lasiris™ Mini laser has the smallest dimensions available on the market for a diode laser producing uniform intensity lines. It is designed for years of reliable operation in systems where size and weight are a limitation. The Lasiris™ patented line-generating optics have been integrated into the Mini laser to yield the same uniform non-Gaussian lines as our well-known SNF laser line generators.

Despite its small diameter (10 mm - less than 0.4"), the Mini is packed with features. It is ESD-protected, reverse-polarity protected, over-temperature protected, and offers a wide range of structured light patterns thanks to its interchangeable head design.

APPLICATIONS

- Machine vision
- Industrial inspection
- 3D contour mapping
- Positioning & visualization
- Biomedical
- High-end alignment

OPTIONS AND CUSTOM UNITS

The laser is available with options allowing you to strobe or control its output electronically and with a wide selection of accessories. Visit us online or contact our application engineers for further details concerning specific requests, since custom units can be built for specialized applications.

SOME AVAILABLE PATTERNS

Single Line



Crosshair*



Parallel Lines



Single Square



Dot Line



7x7 Dot Matrix



Single Dot




See ordering information section for more patterns or call us.

* Lasiris™ crosshair projectors have a single optical component, unlike conventional crosshairs that are formed either by using two lasers or by splitting and recombining one beam to form a cross.

UNIFORM INTENSITY LASER LINES

Conventional laser line patterns are often generated by cylindrical optics that produce a Gaussian line profile with a bright center and fading ends. Lasiris™ patented beam shaping optics spread the light into an evenly illuminated line, resulting in a crisp, uniform line with sharp ends.


LINE INTENSITY PROFILE ALONG LINE LENGTH

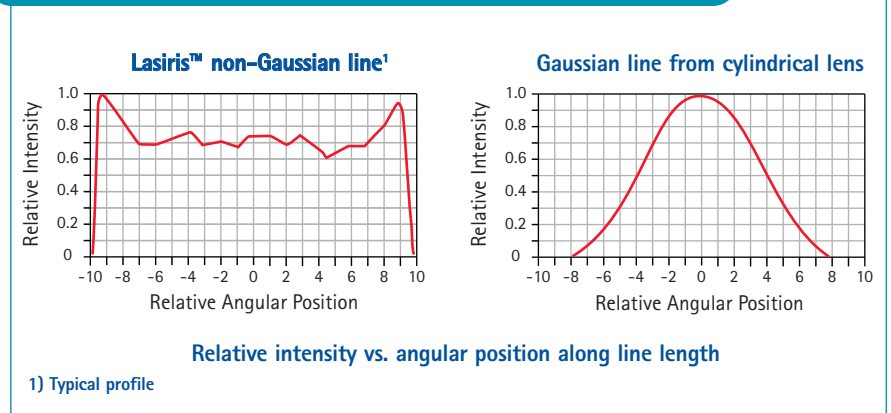

FOCUSING PERFORMANCE

The following figures show the typical focusing and depth-of-field performance of the Mini laser projector. The focus charts indicate the minimum line thickness (at $1/e^2$) achievable for a specific projection distance. The depth-of-field is defined as twice the distance over which the thickness of the line has increased by a factor of $\sqrt{2}$.

FOCUSING AND DEPTH-OF-FIELD PERFORMANCE

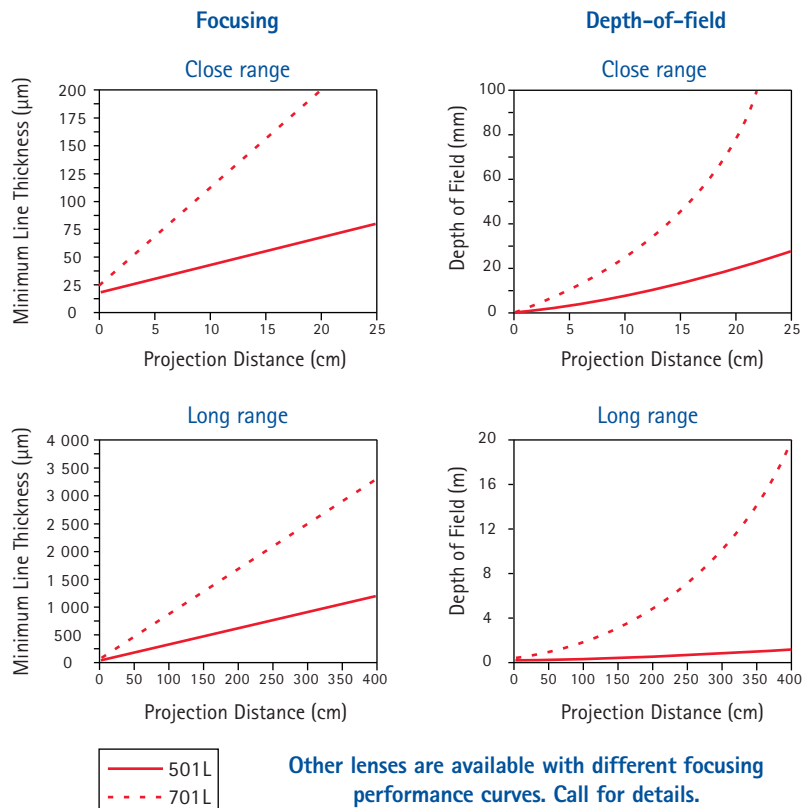

These focus charts are useful for establishing the smallest achievable line thickness for your application. The 501L will produce the smallest line thickness. The 701L produces a thicker line but maintains the line thickness over a longer distance.

The laser can be collimated for minimum divergence. Also, by specifying a desired line thickness and working distance, the laser can be preset to your precise requirements.

LASERS AND EYE SAFETY

Mini lasers can comply with CDRH and IEC certification. Lasers fall in different safety classes depending on output power, wavelength and fan angle.

According to CDRH 21CFR1040.10 regulations, they can be classified Class II, IIIa, or IIIb.



According to IEC 60825-1 regulations, they can be classified Class 1, 1M, 2, 2M, 3R, or 3B. For Class 1M and 2M lasers, viewing the laser output with certain optical instruments (magnifiers, binoculars, etc.) may pose an eye hazard.

Call us, or visit our website for further details.

CAUTION: It is important to follow laser safety rules and wear appropriate protective eyewear when working around lasers. Use of controls, adjustments or performance of procedures other than those specified in the instruction manual may result in hazardous radiation exposure.

SPECIFICATIONS

MECHANICAL SPECIFICATIONS

Weight	12 g
Dimensions	See dimensional diagrams
Housing material	Black anodized aluminum

OPTICAL SPECIFICATIONS

Diode power	1 to 40 mW
Wavelength	635 to 830 nm
Intensity distribution	Uniform (non-Gaussian) lengthwise, Gaussian widthwise
Fan angles	1° to 120°
Line thickness	See focusing charts on page 2
Bore sighting	< 3 mrad

ENVIRONMENTAL SPECIFICATIONS

Operating temperature	-10°C to +48°C with bracket
Wavelength drift	0.25 nm/°C typical
Over-temperature protection	to 48°C

ELECTRICAL SPECIFICATIONS: POWER SUPPLY

Voltage	5 ± 5% Vdc 6 Vdc with optional separate driver Optional 115/220 Vac
Connector type	Male phono-jack 3.5 mm Ø, or custom
Slow start time delay	60 msec
Reverse-polarity protection	

STANDARD OPTIONS

POWER OPTIONS

Power Adjustment Potentiometer

Available only with Separate Electronics Option. The laser power can be easily changed by adjusting an optional built-in potentiometer with a small screwdriver. Code "P".

Pulsing & Power Adjustment


The power can be modulated or pulsed using an external signal. Input voltage of 0 Vdc: "on", 5 Vdc: "off" (or can be reversed). See figure below.

Coding:

- Standard S: 10 kHz Available only with Separate Electronics.
- TTL T*: 10 kHz Available up to 100 kHz. Ask for details.

Impedance	> 1 kΩ
Rise/Fall time	10 µsec for 10 kHz

POWER ADJUSTMENT CURVES

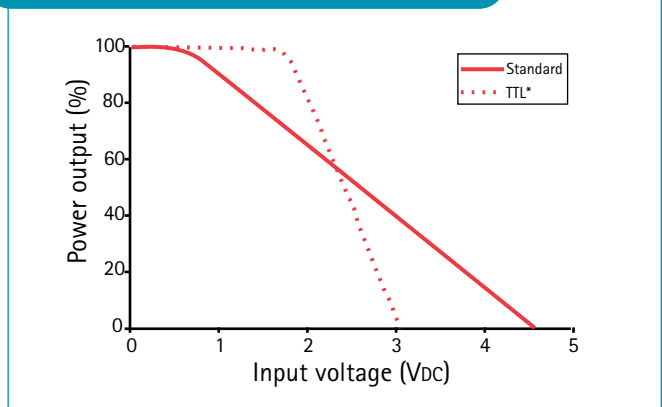

*Not available on all models.

The standard slope can be modified.

SEPARATE ELECTRONICS OPTION

The electronics of the laser can be separated from the main unit. See diagram 'Mini laser with separate electronics option' on the next page for details. Code "SD".

ORDERING INFORMATION


Mini lasers are covered under a 2-year warranty (parts & labor). To order, use the following code: MINI - Pattern (substitute "L" for "D" for dot patterns, etc.) (Interbeam Angle) - Wavelength & Power Option (if applicable) - Diode Power - Fan Angle (for lines) - Separate Electronics option (if applicable; it is a standard for certain wavelength and diode power combinations).
E.g., **MINI-503L(1.5°)-635S-1-20°-SD**. Call us or visit our website for updates and other specifications.

PATTERN ^(A)	INTERBEAM ANGLE ^(B)	WAVELENGTH	DIODE POWER	FAN ANGLE
501L or 701L	1 line	635 nm	1, 5, 10 mW	1° ^(c)
503L or 703L	3 lines	660 nm	1, 5, 10, 20, 35 mW	5°
505L or 705L	5 lines	690 nm	20, 35 mW	10°
509L or 709L	9 lines	785 nm	20, 35 mW	15°
511L or 711L	11 lines	830 nm	30 mW	20°
515L or 715L	15 lines	Custom		30°
519L or 719L	19 lines	Please visit our website or call us for an updated list.		45°
533L or 733L	33 lines	(a) Line patterns are also available as dots -- add "D" instead of "L" in the order code.		60°
599L or 799L	99 lines	(b) At 660 nm		75°
501S	1 square	(c) Not standard for crosshair projector.		90° ^(c)
504G	4x4 grid			120° ^(c)
501H	crosshair			Custom
507X	7x7 dot matrix			
519X	19x19 dot matrix			
Custom				

Other wavelengths and diode powers are available. Please call us for more details.


DIMENSIONAL DIAGRAMS

STANDARD MINI LASER

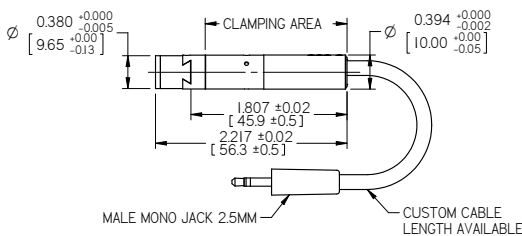

A smaller electronics unit is available for certain models.
Some combinations of specifications may result in different dimensions.
Patents: US #4,826,299 / CAN #1,276,827 / US #5,523,889 / Other patents pending

MINI LASER WITH SEPARATE ELECTRONICS OPTION

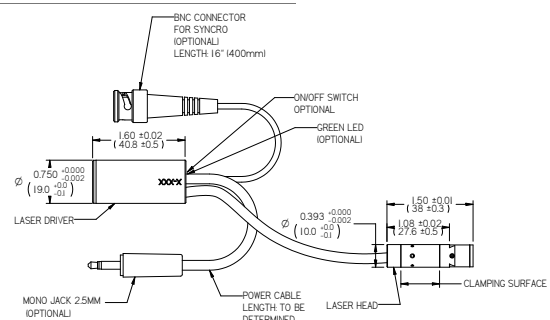

in. [mm]

Information and specifications contained herein are deemed to be reliable and accurate. StockerYale reserves the right to change these specifications at any time without notice.



Corporate Headquarters
32 Hampshire Road
Salem, New Hampshire 03079 USA
Tel.: 603-893-8778 Fax: 603-893-5604
www.stockeryale.com

For sales information:
1-800-814-9552
275 Kesmark
Montreal, Quebec
Canada H9B 3J1
Tel.: (514) 685-1005 Fax: (514) 685-3307
www.stockeryale.com/lasers
lasers@stockeryale.com

For international distributors,
call us, or visit
www.stockeryale.com/laser_distributors